MarCal 16 EWRi-S / 16 EWR-S

Digital Caliper for Special Applications

FUNCTIONS 16 EWRI-S

- ON/OFF
- AUTO-ON / OFF
- mm/inch
- LOCK function (key lock)
- RESET (set display to zero)
- PRESET
  (for entering a numerical value)
- DATA (data transmission)
- HOLD
  (storage of measured values)

FUNCTIONS 16 EWR-S

- ON/OFF
- AUTO-ON / OFF
- mm/inch
- LOCK function (key lock)
- RESET (set display to zero)
- DATA (data transmission via connection cable)
- High contrast analog display
- Locking screw above
- Lapped guideway
- Measuring blade for inside measurements
- Slide and beam made of hardened stainless steel
- Step measuring function
- Immediate measurements due to the Reference System
- Raised guideway for the protection of the scale
- Excellent resistance against dust, coolants and lubricants
- Dirt wipers are integrated in the slide

FEATURES 16 EWRI-S

- SoftwareMarCom Professional free download: www.mahr.com/marcom (only for Mahr data cables and wireless systems with USB and RS232 interface)
- **Digit height:** 11 mm
- **Data interface:** Integrated wireless
- **Energy supply:** Battery life approx. 3 years (approx. 0.5 in wireless mode)
- **IP protection category:** IP 67
- **Package contains:** battery, instruction manual, case

FEATURES 16 EWR-S

- **Digit height:** 8.5 mm
- **Data interface:** USB, Opto RS232C, Digimatic
- **Energy supply:** Battery life approx. 3 years

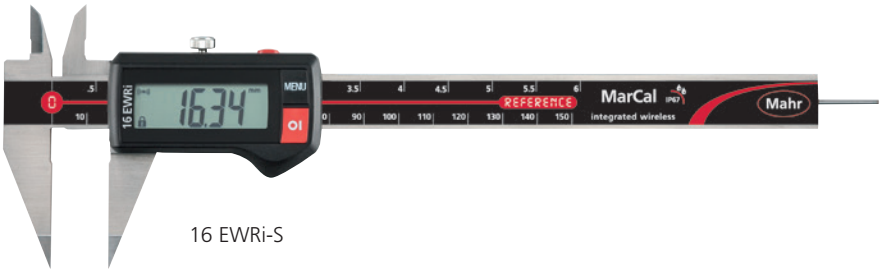

16 EWRi-S

16 EWR-S

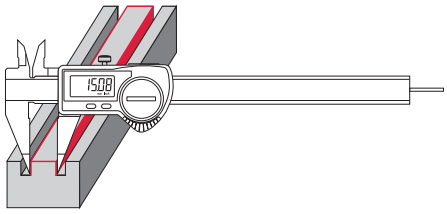

Application:

With pointed jaws e.g. for measuring distances between grooves

TECHNICAL DATA

Order no.	Type	Measuring range	Measuring range inch	Numerical increment	Error limit	Error limit inches (text)	Standard	Depth rod
		mm	inch	mm/inch	mm	inch		
4103375	16 EWRi-S	0 –150	0 –6"	0.01 / .0005"	0.03	.001"	Factory standard	round
4103075	16 EWR-S	0 –150	0 –6"	0.01 / .0005"	0.03	.001"	Factory standard	round

Order no.	a	b	c	d	e
	mm	mm	mm	mm	mm
4103375	10	40	16.5	235	16
4103075	10	40	16.5	235	16

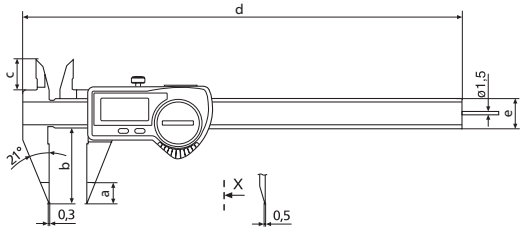

ACCESSORIES

Order no.	For measuring instrument	Product name	Type
4102220	**16 EWRi-S**	Receiver for instruments with integrated wireless	i-Stick
4102357	**16 EWR-S**	16 EXu data connection cable USB (2 m)	16 EXu
4102410	**16 EWR-S**	Data connection cable RS232C (2 m)	16 EXr
4102520	**16 EWR-S, 16 EWRi-S**	Battery 3 V, CR 2032	
4102915	**16 EWR-S**	Digimatic data cable (2 m)	16 EWd

i-Stick